



EWD-N-SV05 型电梯称重装置使用说明[V2.1]

西安伊斯特机电有限公司


工程纸

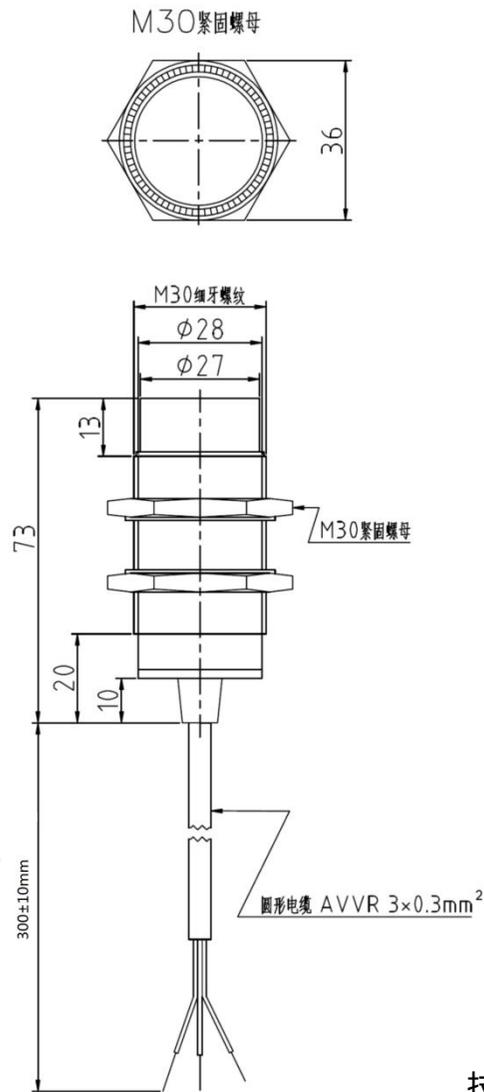

输出曲线

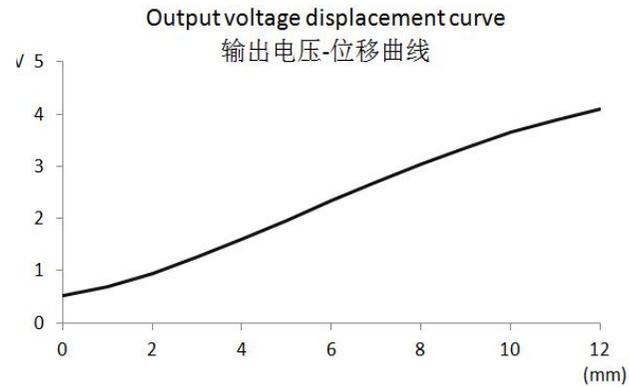

接线图

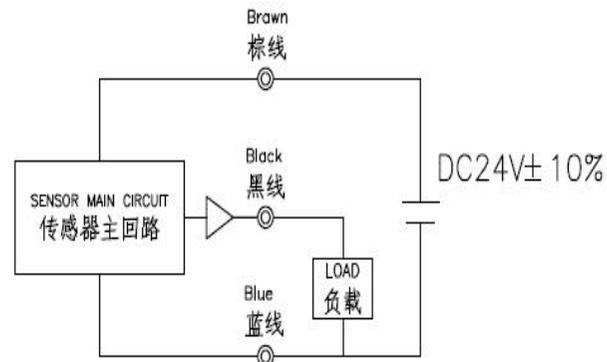

技术支持: 18092639752 或 18092639750

输出特性

| | |
|--------------------------------------|--|
| MEASUREMENT 检出距离 | 1~11mm |
| STANDARD DETECTABLE OBJECT 标准检出体 | 40×40×1mm |
| RATED POWER-SUPPLY VOLTAGE 额定电源电压 | DC24±10% |
| ALLOWANCE VOLTAGE RANGE 允许电压范围 | 16~28V |
| CURRENT CONSUMPTION 消费电流 | DR LESS (EXCEPT LOAD CURRENT) 12mA 以下 (除去负载电流) |
| OUTPUT 输出 | OUTPUT VOLTAGE DEVIATION: OR LESS 电压输出 0.7V~5.8V 偏差: ±5%FS 以下 (*) |
| LOAD IMPEDANCE 负载阻抗 | MORE THAN 大于 2KΩ (3KΩ) |

可靠性

| | |
|------------------------------------|--|
| OPERATING TEMPERATURE 使用环境温度 | -20℃~+70℃ |
| OPERATING HUMIDITY 使用环境湿度 | 35~95%RH |
| TEMPERATURE CHARACTERISTIC 温度特性 | WITHIN ±5%F.S. OF THE OUTPUT VOLTAGE UNDER THE BASE CONDITION IN THE RANGE OF -20~70 DEGREES 在-20℃~+70℃的范围内, 基准状态的输出电压值±5%FS以下 |
| VOLTAGE CHARACTERISTIC 电压特性 | WITHIN ±0.5%F.S. OF THE OUTPUT CURRENT UNDER THE BASE CONDITION BY THE CHANGE IN RATED VOLTAGE ±10% AND 15V ±10% 额定电压±10%变化下, 基准状态的输出电压值±0.5%FS以下 |
| VOLTAGE PROOF 耐电压 | 1 MINUTE AC1000V 50/60Hz 1分钟 (耐压测试仪) |
| INSULATING RESISTANCE 绝缘电阻 | MORE THAN MEGGER 50MΩ以上 (绝缘电阻测试仪) |
| PROTECTIVE CONSTRUCTION 防护等级 | STANDERD IP67 |